

Submittal Data Sheet

Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:
Performance	
Outdoor Unit Model No: REYQ288PBYD	Condensing Unit Type: 24-Ton VRV-III Heat Recovery
Type: Non-Ducted / Ducted	
Rated Cooling Capacity (Btu/hr): 274000	Unit Combination: REMQ120PBYD REMQ96PBYD
Nom Cooling Capacity (Btu/hr): 288000	REMQ72PBYD
Cooling Input Power (kW): 25.61	Indoor: 80°F DB/67°F WB
SEER: N/A	Rated Cooling Outdoor: 95°F DB/75°F WB
IEER: 19.0/17.5	Conditions
Rated Heating Capacity (Btu/hr): 308000	Indoor: 70°F DB/60°F WB
Nom Heating Capacity (Btu/hr): 324000	Rated Heating Outdoor: 47°F DB/43°F WB
Heating Input Power (kW): 26.55	Conditions Catalogi. 47 1 8B/46 1 WB
Heating COP (Btu/hr / Btu/hr): 3.35/3.4	Rated Piping Length (ft) 100 / 50
HSPF: N/A	Rated Height Difference (ft) 0
Heating COP 17F (Btu/hr / Btu/hr): 2.4/2.35	<u>· · · · · · · · · · · · · · · · · · · </u>
Condensing Unit Details	Compressor Type:
Condensing Unit Details Power Supply (V/Hz/Ph): 460/60/3ph	Compressor Type: Inverter
Condensing Unit Details Power Supply (V/Hz/Ph): 460/60/3ph Power Supply Connections: L1, L2, L3 Ground	Capacity Control Range (%): 5 - 100
Condensing Unit Details Power Supply (V/Hz/Ph): 460/60/3ph Power Supply Connections: L1, L2, L3 Ground Min. Circuit Amps MCA (A): 20.5+20.3+16.7	Capacity Control Range (%): 5 - 100 Capacity Index Limit: 144 - 374.4 (130%)
Condensing Unit Details Power Supply (V/Hz/Ph): 460/60/3ph Power Supply Connections: L1, L2, L3 Ground Min. Circuit Amps MCA (A): 20.5+20.3+16.7 Max. Overcurrent Protection (MOP)(A): 30+25+25	Capacity Control Range (%): 5 - 100 Capacity Index Limit: 144 - 374.4 (130%) Airflow Rate (CFM): 7,060+6,530+6,350
Condensing Unit Details Power Supply (V/Hz/Ph): 460/60/3ph Power Supply Connections: L1, L2, L3 Ground Min. Circuit Amps MCA (A): 20.5+20.3+16.7 Max. Overcurrent Protection (MOP)(A): 30+25+25 Max. Starting Current MSC(A): 81	Capacity Control Range (%): 5 - 100 Capacity Index Limit: 144 - 374.4 (130%) Airflow Rate (CFM): 7,060+6,530+6,350 Gas Pipe Connection (inch): 1-3/8
Condensing Unit Details Power Supply (V/Hz/Ph): 460/60/3ph Power Supply Connections: L1, L2, L3 Ground Min. Circuit Amps MCA (A): 20.5+20.3+16.7 Max. Overcurrent Protection (MOP)(A): 30+25+25 Max. Starting Current MSC(A): 81 Rated Load Amps RLA (A): (6.1+8.4)+(3.9+8.4)+7.1	Capacity Control Range (%):5 - 100Capacity Index Limit:144 - 374.4 (130%)Airflow Rate (CFM):7,060+6,530+6,350Gas Pipe Connection (inch):1-3/8Liquid Pipe Connection (inch):3/4
Condensing Unit Details Power Supply (V/Hz/Ph): 460/60/3ph Power Supply Connections: L1, L2, L3 Ground Min. Circuit Amps MCA (A): 20.5+20.3+16.7 Max. Overcurrent Protection (MOP)(A): 30+25+25 Max. Starting Current MSC(A): 81 Rated Load Amps RLA (A): (6.1+8.4)+(3.9+8.4)+7.1 Dimensions Height (Inch): 66-1/8	Capacity Control Range (%): 5 - 100 Capacity Index Limit: 144 - 374.4 (130%) Airflow Rate (CFM): 7,060+6,530+6,350 Gas Pipe Connection (inch): 1-3/8 Liquid Pipe Connection (inch): 3/4 H/L Pressure Connection (inch): 1-1/8
Condensing Unit Details Power Supply (V/Hz/Ph): 460/60/3ph Power Supply Connections: L1, L2, L3 Ground Min. Circuit Amps MCA (A): 20.5+20.3+16.7 Max. Overcurrent Protection (MOP)(A): 30+25+25 Max. Starting Current MSC(A): 81 Rated Load Amps RLA (A): (6.1+8.4)+(3.9+8.4)+7.1 Dimensions Height (Inch): 66-1/8 Dimensions Width (Inch): 109-7/8	Capacity Control Range (%): 5 - 100 Capacity Index Limit: 144 - 374.4 (130%) Airflow Rate (CFM): 7,060+6,530+6,350 Gas Pipe Connection (inch): 1-3/8 Liquid Pipe Connection (inch): 3/4 H/L Pressure Connection (inch): 1-1/8 H/L Equalizing Connection (inch): 3/4
Condensing Unit Details Power Supply (V/Hz/Ph): 460/60/3ph Power Supply Connections: L1, L2, L3 Ground Min. Circuit Amps MCA (A): 20.5+20.3+16.7 Max. Overcurrent Protection (MOP)(A): 30+25+25 Max. Starting Current MSC(A): 81 Rated Load Amps RLA (A): (6.1+8.4)+(3.9+8.4)+7.1 Dimensions Height (Inch): 66-1/8 Dimensions Width (Inch): 109-7/8 Dimensions Depth (Inch): 30-1/8	Capacity Control Range (%): 5 - 100 Capacity Index Limit: 144 - 374.4 (130%) Airflow Rate (CFM): 7,060+6,530+6,350 Gas Pipe Connection (inch): 1-3/8 Liquid Pipe Connection (inch): 3/4 H/L Pressure Connection (inch): 1-1/8 H/L Equalizing Connection (inch): 3/4 Sound Pressure Level (dBA): 63
Condensing Unit Details Power Supply (V/Hz/Ph): 460/60/3ph Power Supply Connections: L1, L2, L3 Ground Min. Circuit Amps MCA (A): 20.5+20.3+16.7 Max. Overcurrent Protection (MOP)(A): 30+25+25 Max. Starting Current MSC(A): 81 Rated Load Amps RLA (A): (6.1+8.4)+(3.9+8.4)+7.1 Dimensions Height (Inch): 66-1/8 Dimensions Width (Inch): 109-7/8	Capacity Control Range (%): 5 - 100 Capacity Index Limit: 144 - 374.4 (130%) Airflow Rate (CFM): 7,060+6,530+6,350 Gas Pipe Connection (inch): 1-3/8 Liquid Pipe Connection (inch): 3/4 H/L Pressure Connection (inch): 1-1/8 H/L Equalizing Connection (inch): 3/4 Sound Pressure Level (dBA): 63 Sound Power Level (dBA):
Condensing Unit Details Power Supply (V/Hz/Ph): 460/60/3ph Power Supply Connections: L1, L2, L3 Ground Min. Circuit Amps MCA (A): 20.5+20.3+16.7 Max. Overcurrent Protection (MOP)(A): 30+25+25 Max. Starting Current MSC(A): 81 Rated Load Amps RLA (A): (6.1+8.4)+(3.9+8.4)+7.1 Dimensions Height (Inch): 66-1/8 Dimensions Width (Inch): 109-7/8 Dimensions Depth (Inch): 30-1/8	Capacity Control Range (%): 5 - 100 Capacity Index Limit: 144 - 374.4 (130%) Airflow Rate (CFM): 7,060+6,530+6,350 Gas Pipe Connection (inch): 1-3/8 Liquid Pipe Connection (inch): 3/4 H/L Pressure Connection (inch): 1-1/8 H/L Equalizing Connection (inch): 3/4 Sound Pressure Level (dBA): 63
Condensing Unit Details Power Supply (V/Hz/Ph): 460/60/3ph Power Supply Connections: L1, L2, L3 Ground Min. Circuit Amps MCA (A): 20.5+20.3+16.7 Max. Overcurrent Protection (MOP)(A): 30+25+25 Max. Starting Current MSC(A): 81 Rated Load Amps RLA (A): (6.1+8.4)+(3.9+8.4)+7.1 Dimensions Height (Inch): 66-1/8 Dimensions Width (Inch): 109-7/8 Dimensions Depth (Inch): 30-1/8 Net Weight (Ibs): 573+573+463	Capacity Control Range (%): 5 - 100 Capacity Index Limit: 144 - 374.4 (130%) Airflow Rate (CFM): 7,060+6,530+6,350 Gas Pipe Connection (inch): 1-3/8 Liquid Pipe Connection (inch): 3/4 H/L Pressure Connection (inch): 1-1/8 H/L Equalizing Connection (inch): 3/4 Sound Pressure Level (dBA): 63 Sound Power Level (dBA): 49
Condensing Unit Details Power Supply (V/Hz/Ph): 460/60/3ph Power Supply Connections: L1, L2, L3 Ground Min. Circuit Amps MCA (A): 20.5+20.3+16.7 Max. Overcurrent Protection (MOP)(A): 30+25+25 Max. Starting Current MSC(A): 81 Rated Load Amps RLA (A): (6.1+8.4)+(3.9+8.4)+7.1 Dimensions Height (Inch): 66-1/8 Dimensions Width (Inch): 109-7/8 Dimensions Depth (Inch): 30-1/8 Net Weight (Ibs): 573+573+463 System Details Refrigerant Type: R-410A	Capacity Control Range (%): 5 - 100 Capacity Index Limit: 144 - 374.4 (130%) Airflow Rate (CFM): 7,060+6,530+6,350 Gas Pipe Connection (inch): 1-3/8 Liquid Pipe Connection (inch): 3/4 H/L Pressure Connection (inch): 1-1/8 H/L Equalizing Connection (inch): 3/4 Sound Pressure Level (dBA): 63 Sound Power Level (dBA): 49 Cooling Operation Range (°F): 23 - 110
Condensing Unit Details Power Supply (V/Hz/Ph): 460/60/3ph Power Supply Connections: L1, L2, L3 Ground Min. Circuit Amps MCA (A): 20.5+20.3+16.7 Max. Overcurrent Protection (MOP)(A): 30+25+25 Max. Starting Current MSC(A): 81 Rated Load Amps RLA (A): (6.1+8.4)+(3.9+8.4)+7.1 Dimensions Height (Inch): 66-1/8 Dimensions Width (Inch): 109-7/8 Dimensions Depth (Inch): 30-1/8 Net Weight (Ibs): 573+573+463 System Details Refrigerant Type: R-410A Holding Refrigerant Charge (Ibs): 20.1+19.8+18.1	Capacity Control Range (%): 5 - 100 Capacity Index Limit: 144 - 374.4 (130%) Airflow Rate (CFM): 7,060+6,530+6,350 Gas Pipe Connection (inch): 1-3/8 Liquid Pipe Connection (inch): 3/4 H/L Pressure Connection (inch): 1-1/8 H/L Equalizing Connection (inch): 3/4 Sound Pressure Level (dBA): 63 Sound Power Level (dBA): 49 Cooling Operation Range (°F): 23 - 110 Cooling Range w/Baffle (°F):
Condensing Unit Details Power Supply (V/Hz/Ph): 460/60/3ph Power Supply Connections: L1, L2, L3 Ground Min. Circuit Amps MCA (A): 20.5+20.3+16.7 Max. Overcurrent Protection (MOP)(A): 30+25+25 Max. Starting Current MSC(A): 81 Rated Load Amps RLA (A): (6.1+8.4)+(3.9+8.4)+7.1 Dimensions Height (Inch): 66-1/8 Dimensions Width (Inch): 109-7/8 Dimensions Depth (Inch): 30-1/8 Net Weight (Ibs): 573+573+463 System Details Refrigerant Type: R-410A Holding Refrigerant Charge (Ibs): 20.1+19.8+18.1 Additional Charge (Ibs/ft): install data	Capacity Control Range (%): Capacity Index Limit: Airflow Rate (CFM): Gas Pipe Connection (inch): Liquid Pipe Connection (inch): H/L Pressure Connection (inch): 1-1/8 H/L Equalizing Connection (inch): Sound Pressure Level (dBA): Sound Power Level (dBA): Max. No. of Indoor Units: Cooling Operation Range (°F): Heating Operation Range (°F): 0 - 77 / (-4) - 60
Condensing Unit Details Power Supply (V/Hz/Ph): 460/60/3ph Power Supply Connections: L1, L2, L3 Ground Min. Circuit Amps MCA (A): 20.5+20.3+16.7 Max. Overcurrent Protection (MOP)(A): 30+25+25 Max. Starting Current MSC(A): 81 Rated Load Amps RLA (A): (6.1+8.4)+(3.9+8.4)+7.1 Dimensions Height (Inch): 66-1/8 Dimensions Width (Inch): 109-7/8 Dimensions Depth (Inch): 30-1/8 Net Weight (Ibs): 573+573+463 System Details Refrigerant Type: R-410A Holding Refrigerant Charge (Ibs): 20.1+19.8+18.1 Additional Charge (Ibs/ft): install data Pre-charge Piping (Length ft): -	Capacity Control Range (%): 5 - 100 Capacity Index Limit: 144 - 374.4 (130%) Airflow Rate (CFM): 7,060+6,530+6,350 Gas Pipe Connection (inch): 1-3/8 Liquid Pipe Connection (inch): 3/4 H/L Pressure Connection (inch): 1-1/8 H/L Equalizing Connection (inch): 3/4 Sound Pressure Level (dBA): 63 Sound Power Level (dBA): 49 Cooling Operation Range (°F): 23 - 110 Cooling Range w/Baffle (°F):
Condensing Unit Details Power Supply (V/Hz/Ph): 460/60/3ph Power Supply Connections: L1, L2, L3 Ground Min. Circuit Amps MCA (A): 20.5+20.3+16.7 Max. Overcurrent Protection (MOP)(A): 30+25+25 Max. Starting Current MSC(A): 81 Rated Load Amps RLA (A): (6.1+8.4)+(3.9+8.4)+7.1 Dimensions Height (Inch): 66-1/8 Dimensions Width (Inch): 109-7/8 Dimensions Depth (Inch): 30-1/8 Net Weight (Ibs): 573+573+463 System Details Refrigerant Type: R-410A Holding Refrigerant Charge (Ibs): 20.1+19.8+18.1 Additional Charge (Ibs/ft): install data Pre-charge Piping (Length ft): - Max. Pipe Length (Total ft):	Capacity Control Range (%): Capacity Index Limit: Airflow Rate (CFM): Gas Pipe Connection (inch): Liquid Pipe Connection (inch): H/L Pressure Connection (inch): 1-1/8 H/L Equalizing Connection (inch): Sound Pressure Level (dBA): Sound Power Level (dBA): Max. No. of Indoor Units: Cooling Operation Range (°F): Heating Operation Range (°F): 0 - 77 / (-4) - 60
Condensing Unit Details Power Supply (V/Hz/Ph): 460/60/3ph Power Supply Connections: L1, L2, L3 Ground Min. Circuit Amps MCA (A): 20.5+20.3+16.7 Max. Overcurrent Protection (MOP)(A): 30+25+25 Max. Starting Current MSC(A): 81 Rated Load Amps RLA (A): (6.1+8.4)+(3.9+8.4)+7.1 Dimensions Height (Inch): 66-1/8 Dimensions Width (Inch): 109-7/8 Dimensions Depth (Inch): 30-1/8 Net Weight (Ibs): 573+573+463 System Details Refrigerant Type: R-410A Holding Refrigerant Charge (Ibs): 20.1+19.8+18.1 Additional Charge (Ibs/ft): install data Pre-charge Piping (Length ft): -	Capacity Control Range (%): Capacity Index Limit: Airflow Rate (CFM): Gas Pipe Connection (inch): Liquid Pipe Connection (inch): H/L Pressure Connection (inch): 1-1/8 H/L Equalizing Connection (inch): Sound Pressure Level (dBA): Sound Power Level (dBA): Max. No. of Indoor Units: Cooling Operation Range (°F): Heating Operation Range (°F): 0 - 77 / (-4) - 60




Submittal Data Sheet

Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

Dimensional Drawing - Condensing Unit

REYQ288PBYD

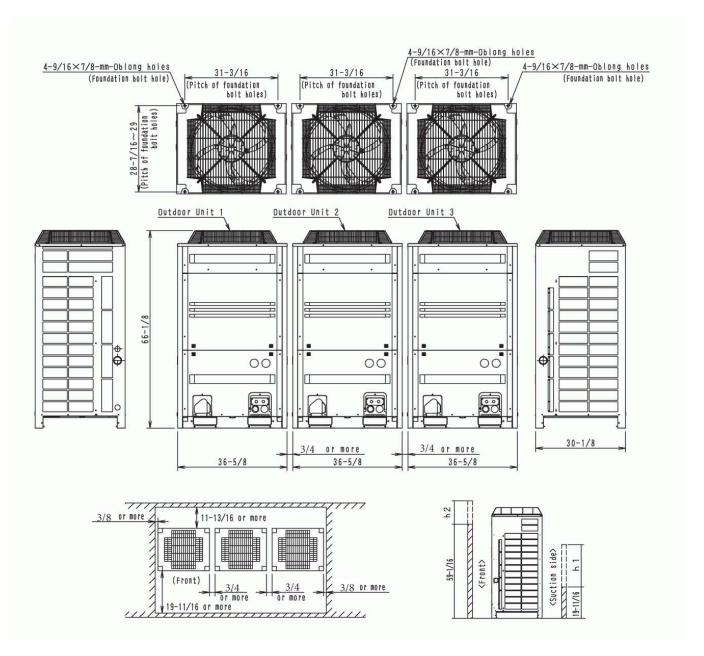



Submittal Data Sheet

Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



REYQ288PBYD

Std U.S. Warranty: 7yrs Compressor, 1yrs Parts