

## Model: PAC-YT53CRAU

Job Name:	Location:	Date:
Purchaser:	Engineer:	
Submitted to:	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction	
System Designation:	Schedule No.:	





### OPTIONAL WIRED, WALL-MOUNTED SIMPLE MA REMOTE CONTROLLER (PAC-YT53CRAU) SPECIFICATIONS

- For use with P-Series and M-Series systems (M-Series requires MAC-333IF System Control interface, sold separately)
- Controls group operation for up to 16 indoor units in a single group
- Supports both Fahrenheit and Celsius
- User defined functions:
  - ON/OFF
  - Operation mode: Auto\*, Cool, Heat, Fan, or Drying (Note: \*Heat Pump Models only)
  - Set temperature
  - Fan speed setting
  - Air flow direction
  - Set temperature range: 40°F - 95°F depending on operation mode and indoor unit connected.
- Set temperature range limit: Simple MA allowable set temperature range can be reduced for cool and heat modes.
- Room temperature can be sensed either at the indoor unit (default) or at the remote controller.
- Wiring: Uses two-wire, stranded, non-polar control wire for connecting to the indoor unit or control adapter. Requires crossover wiring for grouping across indoor units.
- Dimensions: 2-3/4 x 9/16 x 4-3/4" (70 x 14.5 x 120mm).

Notes:

# Model: PAC-YT53CRAU – DIMENSIONS

Unit:mm[in.]

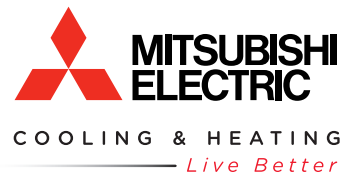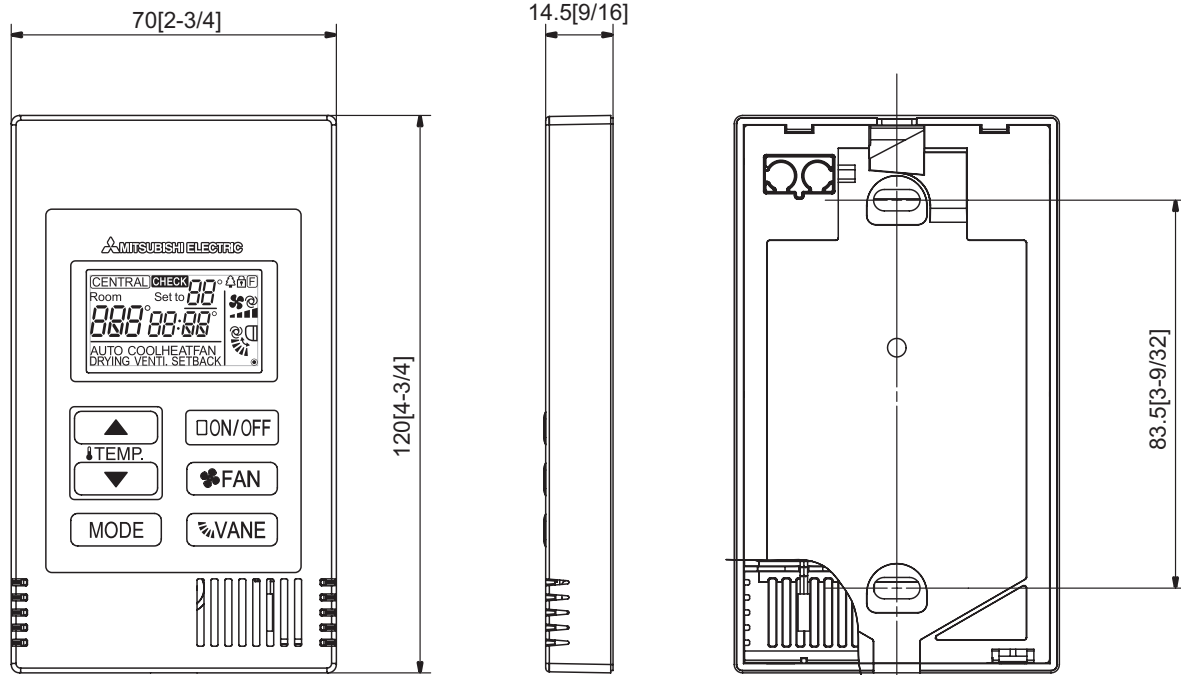

1340 Satellite Boulevard  
Suwanee, GA 30024  
Tele: 678-376-2900 • Fax: 800-889-9904  
Toll Free: 800-433-4822  
[www.mehvac.com](http://www.mehvac.com)